



Infrapalm

An elegant, portable heating solution

Infrapalm is a stylish and practical freestanding heater for terraces and outdoor restaurants where there are no walls or other mounting possibilities.

Infrapalm has a modern, ergonomic design which makes it easy to position and use.

It includes 2 or 3 infrared heaters providing comfortable heat in several directions.


- Equipped with 2 or 3 infrared heaters, with a total heat output of 3000 - 6000 W.
- Halogen lamp with gold infrared tube and polished aluminium reflector.
- Equipped with a tip guard which switches off the heaters if the post should fall.
- High protection class, IP67.
- Table available as an accessory.
- Casing in powder-coated aluminium. Colours: white RAL9010 or black RAL9005.



Infrapalm (IP67)

| Type | Heat output [W] | Voltage [V] | Colour | Max. filament temperature [°C] | Dimensions WxH [mm] | Weight [kg] |
|---------|--------------------|----------------|--------|-----------------------------------|---------------------------|----------------|
| IHPA30W | 3000 (2x1500) | 400V3N~ | White | 1800 | 1100x2500-2700 | 45 |
| IHPA30B | 3000 (2x1500) | 400V3N~ | Black | 1800 | 1100x2500-2700 | 45 |
| IHPA40W | 4000 (2x2000) | 400V3N~ | White | 1800 | 1100x2500-2700 | 45 |
| IHPA40B | 4000 (2x2000) | 400V3N~ | Black | 1800 | 1100x2500-2700 | 45 |
| IHPA60W | 6000 (3x2000) | 400V3N~ | White | 1800 | 1100x2500-2700 | 45 |
| IHPA60B | 6000 (3x2000) | 400V3N~ | Black | 1800 | 1100x2500-2700 | 45 |

Dimensions

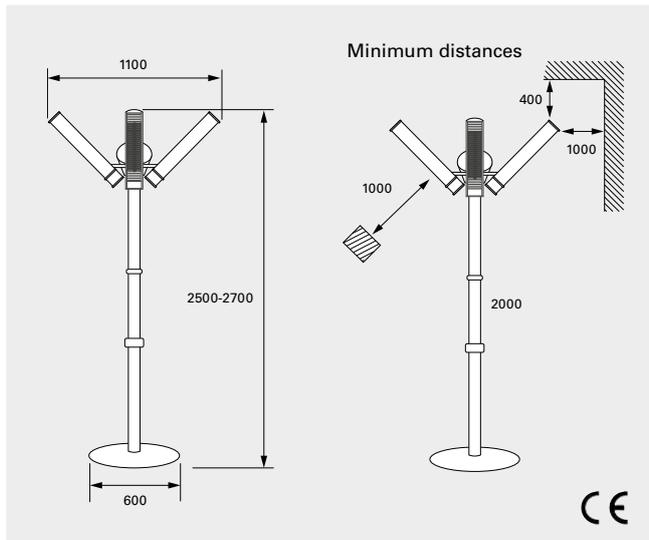

Mounting and connection

Mounting

Infrapalm is a standalone heater which is used when there are no walls or other suspension options. As it is portable, Infrapalm can be placed directly on the floor in areas which need to be heated. Several heaters are required for larger areas. Optimum comfort is achieved if the heat is distributed from at least two directions.

Connection

When installing, connect an extension cord of suitable length to the appliance.



Accessories

IHMC6, central controller with keypad

Central controller which controls 3 x 2 kW. The keypad can control a maximum of 54 kW in total in nine zones or a minimum 3 x 2 kW in 3 zones, in nine steps. 6000W, 400V3~, IP65.

IHMC6S, central controller (slave)

Slave unit without keypad. Central controller which controls 3 x 2 kW. 6000W, 400V3~, IP65.

IHPAT, table

Table for Infrapalm. Made of pressed wood and melamine. Colour: black. Dimensions: 600x600x30 mm.

| Type | Description | HxWxD [mm] |
|--------|---|------------|
| IHMC6 | Central controller with keypad, 6000 W, 400V3~, IP650 | 170x280x87 |
| IHMC6S | Central controller (slave), 6000 W, 400V3~, IP65 | 170x280x87 |
| IHPAT | Table for Infrapalm | 30x600x600 |

